
Model 9600

For those that love more, the Model 9600 gooseneck slant load horse trailer is for you! The trailer is available in 2 through 6 horse floorplans with dressing room short wall options of 50” or 72”. The 9600 includes a number of standard features like Air Flo dividers, matching spare tire, rear LED load light, white lining on the walls, one exterior tie ring per horse per side and much more.



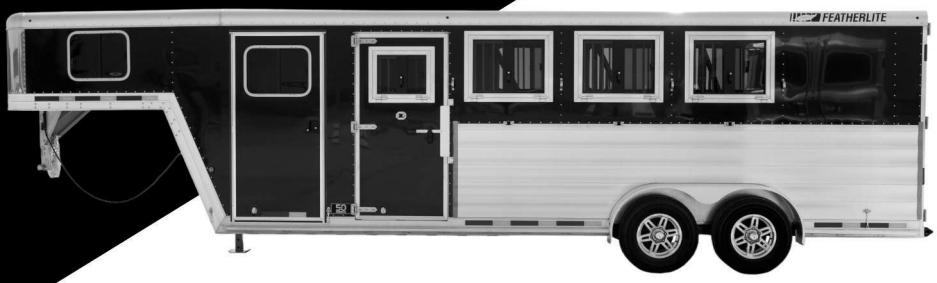

TRAILER HIGHLIGHTS

- 2, 3, 4, 5 or 6-horse floorplans
- Slant load
- 7’ width
- 7’ inside height
- Dressing room of 50” or 72”
- Premium Goodyear® tires and aluminum wheels standard
- Padded stall dividers standard
- 10-year limited structural & 3-year hitch-to-bumper warranty*

SO MANY FEATURES

ARE NOW STANDARD







WHAT'S NEW?

NEW MODEL 9600	PREVIOUS MODEL	BENEFIT
All unload doors, drop down feed doors and camper doors are now square cornered.	Previous doors had rounded corners. Squared corner doors were optional.	The larger drop down feed doors allow even more light into the horse area. The square corners give a more distinctive and uniform look to the trailer.
An LED load light above the rear load door and switch are standard.	Rear LED load lights were optional.	A rear LED load light provides extra light and visibility at night during loading and unloading. This new style of light is also brighter than our previous optional offerings.
One outside tie ring per horse per side is standard.	Most floorplans included fewer tie rings.	Additional tie rings give horse owners more options for securing their horses.
Air Flo dividers with shoulder separator and slam latch are now standard.	Horse dividers were a solid panel. Air Flo dividers were optional.	The Air Flo stall divider design with vertical bars allows for more airflow throughout the horse area, giving horses more comfort during their ride.
The 9600 features Featherlite's new rivetless aluminum side sheet design.	Trailer exterior previously featured rivets at the seams of the side sheets.	This new design gives the trailer a sleeker, smoother looking exterior. It also allows for easier graphic application.
Double rear doors with windows, stainless steel double pipe hardware and no center post is standard.	Aluminum hardware was used previously. Pressure latches were standard on select floorplans.	The new rear door hardware and configuration lends to more durability over the life of the trailer.
The Featherlite camper door features a new double pin latch mechanism.	Single latch was found on the camper door previously.	This double pin latch more securely closes the camper door.
Interior LED light strips are now standard (quantity varies by length of trailer.)	Previous LED interior light was smaller.	The new style of interior LED light creates a brighter horse trailer interior.
Matching spare tire and rim are standard.	Spare tire and rim were optional.	This new feature gives horse trailer owners extra peace of mind for no additional cost.
Featherlite horse trailers are now built with 1 5/8" side posts.	Side posts were varying widths depending on the floorplan/model.	This provides a more uniform wall width throughout the trailer.
Aluminum halter hooks are standard.	Halter hooks were plastic previously. Aluminum halter hooks were optional.	This enhancement offers more durability and value.
The horse area side of the rear tack wall is now lined with white aluminum.	Previously, this side of the rear tack wall was natural aluminum.	The white lining allows for more brightness and uniformity within the horse area interior.
The right side of the rear tack wall compartment behind the halter hooks is now lined with turf.	Previously, this side was natural aluminum.	The turf helps to reduce wear and tear on the rear tack wall plus should help to reduce noise from this area.

For more details, visit www.fthr.com.

FEATHERLITE TRAILERS®

*10-year limited structural warranty on frame and superstructure. 3-year limited warranty on all other parts manufactured and installed by Featherlite. Some exclusions apply. Ask dealer for details. **Trailer may be shown with options and specifications subject to change.